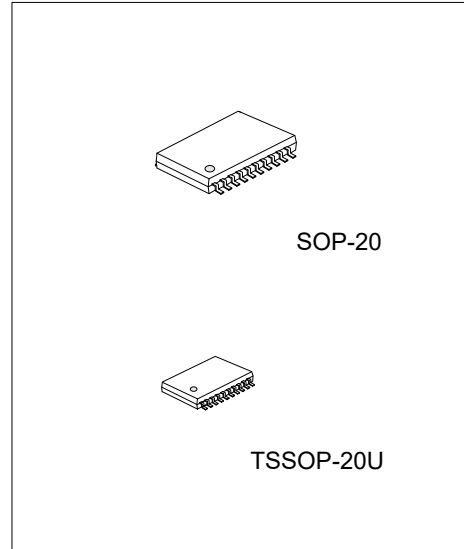


**U74HCT573****CMOS IC****OCTAL TRANSPARENT D-TYPE
LATCHES WITH 3-STATE
OUTPUTS****DESCRIPTION**

The UTC **U74HCT573** are octal D-type transparent latches featuring separate D-type inputs for each latch and non-inverting 3-state outputs for bus-oriented applications.


FEATURES

- * Operation Voltage Range: 4.5V~5.5V
- * 3-state Non-Inverting Outputs for Bus-oriented Applications
- * Common 3-state Output Enable Input
- * Inputs are TTL voltage compatible


**ORDERING INFORMATION**

Ordering Number		Package	Packing
Lead Free	Halogen Free		
U74HCT573L-S20-R	U74HCT573G-S20-R	SOP-20	Tape Reel
U74HCT573L-ULA-R	U74HCT573G-ULA-R	TSSOP-20U	Tape Reel

U74HCT573G-S20-R (1) Packing Type (2) Package Type (3) Green Package	(1) R: Tape Reel (2) S20: SOP-20, ULA: TSSOP-20U (3) G: Halogen Free and Lead Free, L: Lead Free
--	---

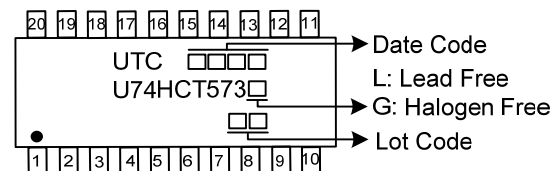MARKING


PIN CONFIGURATION

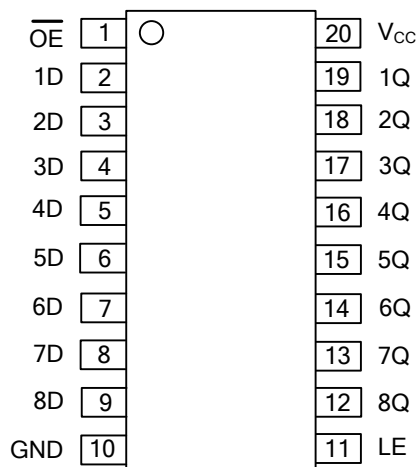

FUNCTION TABLE

INPUTS($\overline{OE}$)	INPUTS(LE)	INPUTS(D)	OUTPUT(Q)
L	H	H	H
L	H	L	L
L	L	X	Q0
H	X	X	Z

LOGIC DIAGRAM

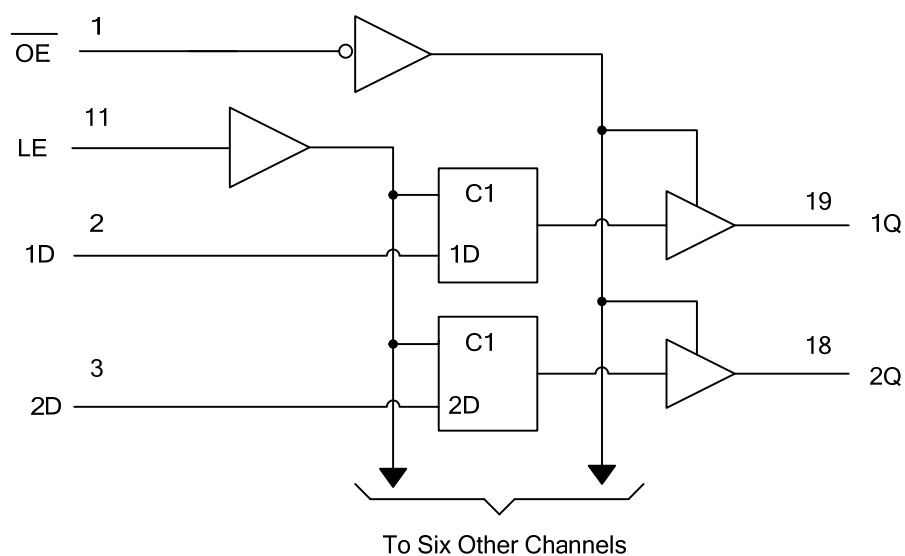

■ ABSOLUTE MAXIMUM RATING(unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V_{CC}	-0.5 ~ 7.0	V
Input Voltage	V_{IN}	-0.5 ~ $V_{CC}+0.5$	V
Output Voltage(active mode)	V_{OUT}	-0.5 ~ $V_{CC}+0.5$	V
Input Clamp Current ($V_{IN}<0$)	I_{IK}	±20	mA
Output Clamp Current ($V_{OUT}<0$)	I_{OK}	±20	mA
Output Current	I_{OUT}	±35	mA
V_{CC} or GND Current	I_{CC}	±70	mA
Storage Temperature	T_{STG}	-65 ~ +150	°C

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

■ RECOMMENDED OPERATING COMDITIONS

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT
Supply Voltage	V_{CC}	4.5	5	5.5	V
Input Voltage	V_{IN}	0		V_{CC}	V
Output Voltage	V_{OUT}	0		V_{CC}	V
Operating Temperature	T_{OPR}	-40		+125	°C
Input Transition Rise or Fall Rate	t_r	0		500	ns

■ ELECTRICAL CHARACTERISTICS($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
High-Level Input Voltage	V_{IH}	$V_{CC}=4.5\text{V}\sim 5.5\text{V}$	2.0	1.6		V
Low-Level Input Voltage	V_{IL}	$V_{CC}=4.5\text{V}\sim 5.5\text{V}$		1.2	0.8	V
High-Level Output Voltage	V_{OH}	$V_{CC}=4.5\text{V}$, $I_{OH}=-20\mu\text{A}$	4.4	4.499		V
		$V_{CC}=4.5\text{V}$, $I_{OH}=-6\text{mA}$	3.98	4.3		V
Low-Level Output Voltage	V_{OL}	$V_{CC}=4.5\text{V}$, $I_{OL}=20\mu\text{A}$		0.001	0.1	V
		$V_{CC}=4.5\text{V}$, $I_{OL}=6\text{mA}$		0.17	0.26	V
Input Leakage Current	$I_{I(LEAK)}$	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND		±0.1	±100	nA
Output OFF -State Current	I_{OZ}	$V_{CC}=5.5\text{V}$, $V_{OUT}=V_{CC}$ or GND		±0.01	±0.5	μA
Quiescent Supply Current	I_{CC}	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$			8	μA
Additional Quiescent Supply Current	ΔI_{CC}	$V_{CC}=5.5\text{V}$, One input at 0.5V or 2.4V, other inputs at 0 or V_{CC}		1.4	2.4	mA
Input Capacitance	C_{IN}	$V_{CC}=5.5\text{V}$, $V_{IN}=V_{CC}$ or GND		3	10	pF

■ TIMING REQUIREMENTS($T_a=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Pulse Duration, LE High	t_w	$V_{CC}=4.5\text{V}$	20			ns
Setup Time, Data Before LE↓	t_{SU}	$V_{CC}=4.5\text{V}$	10			ns
Hold Time, Data After LE↓	t_H	$V_{CC}=4.5\text{V}$	5			ns


■ **DYNAMIC CHARACTERISTICS** ($T_A=25^{\circ}\text{C}$, $C_L=50\text{pF}$, $R_L=1\text{k}\Omega$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Propagation Delay From Input (D) To Output (Q)	t_{PD} (t_{PLH}/t_{PHL})	$V_{CC}=4.5\text{V}$		20	35	ns
Propagation Delay From Input (LE) To Output (Q)	t_{PD} (t_{PLH}/t_{PHL})	$V_{CC}=4.5\text{V}$		18	35	ns
3-State Output Enable Time From Input ($\overline{OE}$) To Output (Q)	t_{EN} (t_{PZL}/t_{PZH})	$V_{CC}=4.5\text{V}$		17	35	ns
3-State Output Disable Time From Input ($\overline{OE}$) To Output (Q)	t_{DIS} (t_{PLZ}/t_{PHZ})	$V_{CC}=4.5\text{V}$		18	35	ns
Output transition time, (Q)	t_T (t_R/t_F)	$V_{CC}=4.5\text{V}$		5	12	ns

■ **OPERATING CHARACTERISTICS**

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Power Dissipation Capacitance	C_{PD}	No load		50		pF





■ TEST CIRCUIT AND WAVEFORMS

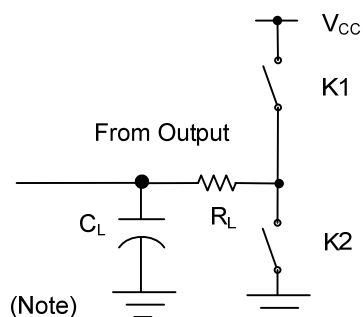

TEST	K1	K2
t_{PLH}/t_{PHL}	Open	Open
t_{PHZ}/t_{PZH}	Open	Close
t_{PLZ}/t_{PZL}	Close	Open

Note: C_L includes probe and jig capacitance.

$P_{RR} \leq 1\text{MHz}$, $Z_O = 50\Omega$, $t_R \leq 6\text{ns}$, $t_F \leq 6\text{ns}$

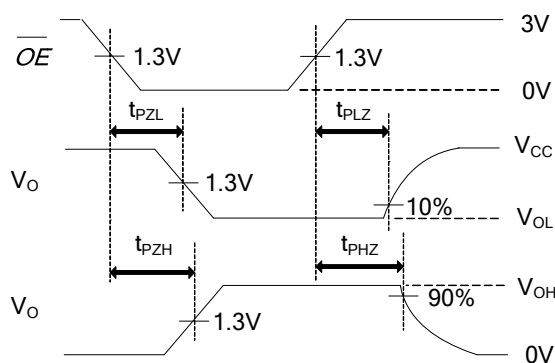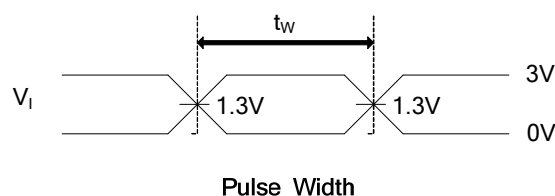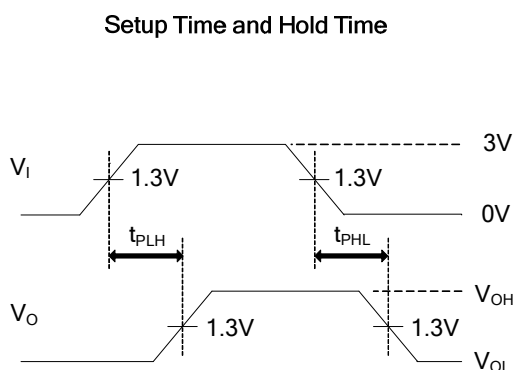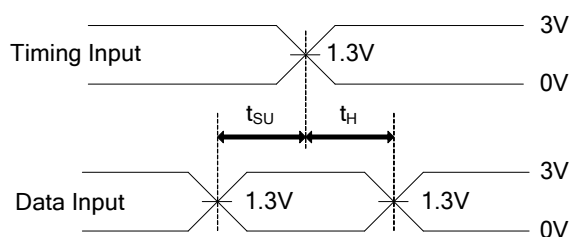

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.